

1098 manual

Ducati 1098 1098s 2007-2009 Service Repair Manual

[Download Now](#)



Instant download 2007-2009 Ducati 1098 1098s service repair manual. It is an inexpensive way to keep your machine working properly. Each manual provides step-by-step instructions based on the complete disassembly of the machine. Download Service Repair Manual for Ducati 1098 1098s 2007 2008 2009

This highly detailed digital repair manual contains everything you will ever need to repair, maintain, rebuild, refurbish or restore your 2007 2008 2009 Ducati 1098 1098s.

This is the same information the dealer technicians and mechanics use to diagnose and repair your bike. With this professional quality highly detailed service repair manual, you

www.FilesEZ.com

Page 1/46

File Name: 1098 manual.pdf

Size: 4982 KB

Type: PDF, ePub, eBook

Category: Book

Uploaded: 25 May 2019, 14:37 PM

Rating: 4.6/5 from 749 votes.

Download Now!

Please check the box below to proceed.



I'm not a robot



reCAPTCHA
Privacy - Terms

Book Descriptions:

1098 manual




Ducati Motor Holding S.p.A. cannot accept any liability We are sure that you will use your Ducati for longer journeys for errors that may have occurred in the preparation of this as well as short daily trips, but however you use your manual. All information in the manual is valid at the time of motorcycle, Ducati Motor Holding s.p.a wishes you an going to print. DucatIf in doubt, please contact a Ducati Dealer or Authorized Service Centre. You will find the information in the manual useful on trips which Ducati Motor Holding S.p.A. hopes will be smooth and enjoyable, and it will help you obtain top performance from your motorcycle for a long time. This booklet uses a set of symbols with special meaniBe sure you are clearly visible and avoid riding within the Warning blind spot of a vehicle in front of you. Read this section before riding your motorcycle. Be very careful at road junctions, or when riding in areas near exits from private land or car parks, or on the slip roads to Many accidents are the result of the inexperience of the motorways. rSecure the luggage firmly to the motorcycle structure. Even weight distribution is critical for maintaining safety Luggage incorrectly secured may cause the motorcycle to standards and to avoid getting into difficulties when become unstable.Indicates engine revs per minute. 3 Neutral N indicator green. Illuminates when the gearbox is in neutral. 4 Fuel warning light yellow. 1 Comes on when there are about 3 litres of fuel left in the tank. E 5 Turn indicator light green. Illuminates and flashes when the turn indicator is in operation. 6 Engine oil pressure light red. Comes on when engine oil pressure is too low. This light must illuminate wIndicates road speed. E 2 Odometer. 11 Shows total distance travelled. 3 Trip meter. Shows the distance travelled since the last reset TRIP A and TRIP B. 2 3 4 1 6 7 8 9 12 13 14 4 Fuel reserve trip counter. Shows distance travelled in on the reserve fuel.

fig.<http://www.regionoverseas.com.np/userfiles/electromate-400-manual.xml>


- **1098 manual, 1098 manual fisher, ducati 1098 manual, 1098 instruction manual,**

rotel 1098 manual, rsp-1098 manual, ducati 1098 manual service, 1098-egr instruction manual, rotel rsp 1098 manual, ducati streetfighter 1098 manual, 1098 manual, 1098 manuel a ortiz ave el centro ca 92243, fisher 1098 manual, ducati 1098 manual, 1098 fisher regulator manual.

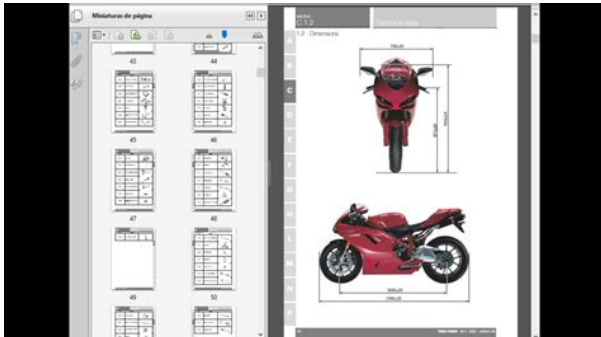

6 5 C I The message is displayed only at KeyOn for 5 seconds. The counter is reset at a DUCATI Authorised Workshop during the maintenance operations. 13 Immobilizer indicator CODE fig. 6. The message "CODE" appears when the key code is wrong or not recognized, and flashes after an error signal from the immobilizer system has been reset by performing E the immobilizer o The model is displayed cyclically until the engine is started. UK is activated automatically, regardless of the function vs. EU v.s. USA displayed. If the fuel level remains in reserve, the reading is saved even after KeyOff. The count stops automatically when the fuel level rises above reserve. If the reading exceeds 999.9, it is reset and the count E restarts automatically. fig. 12 vs. EU Air temperature indicator Shows the outside. W ARNING T o reduce the risk of fire or electric shock, do not expose the unit to moisture or water. Boxed letters refer to RR1050 illustration. Find the remote control and other accessories. Save the box as it will protect the RSP1098 if you move or need to return it for maintenance. An indication appears in the front panel and onscreen displays. Press the button again to restore previous volume levels. MUTE Button Push the MUTE button once to turn the sound off. Front Panel Rotate the front panel VOLUME knob clockwise to increase the volume, counterclockwise to decrease. All five speakers play the normal bass recorded in their respective channels. The subwoofer plays only the LFE channel bass. T o play a Dolby Digital or DTS soundtrack at the reference volume level, simply return to that volume setting. Pagina 4 1 Front and Rear Panels RSP1098 Surround Sound Processor 4 Pagina 7 4 Outputs 7 English Contents CONNECTIONS 13 Making Connections. 17 Boxed numbers refer. Pagina 11 11 English. Remote Control Overview. 19 Overview of Surround Formats. 22 SETUP 29. Using the RR1050 Dolby. Pagina 12 Other features RSP1098 Surround Sound Processor


12. <http://chateausainteadele.com/userfiles/electromagnetics-solutions-manual.xml>

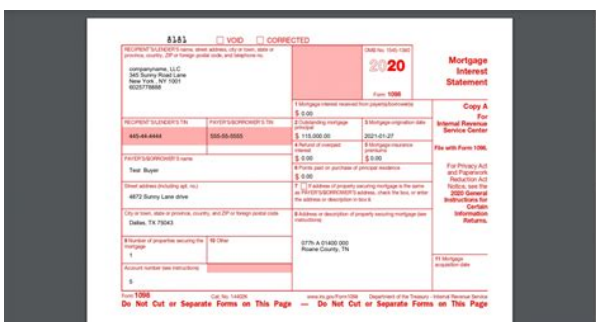

About Rotel Getting Started Surround features. A family. Pagina 13 TAPE Outputs 13 English.

Unpacking NOTE Each source input must be properly. Remove the unit carefully from its packing. Find. Five. Pagina 15 Digital Inputs 15 English. Composite Video Inputs. NOTE When using digital connections, you 12V TRIGGER Connections NOTE The IR signals from the EXT REMOTE Making Connections corresponding OUTPUT connections. If you Pagina 19 POWER Button 19 English. MUTE Button MODE Button Programming the RR1050 Push the MUTE button once to turn the. The large rocker button is the master VOLUME This. Pagina 21 Selecting a Source Input from the Front Panel 21 English. Volume Adjustments Display Options input is assigned, the unit will not access a Selecting a Source from the Dolby Surround The most common use of Dolby Digital in. Like Dolby Digital, DTS can only be used on DTS has added a similar capability for record. Pagina 24 Manually Selecting Surround Modes RSP1098 Surround Sound Processor 24. Other Digital Formats MP3 The RSP1098 also features a decoder NOTE A digital signal. Manual settings available from the front panel Dolby Digital 5.1 Dolby Digital 2.0. Pagina 26 Analog Stereo RSP1098 Surround Sound Processor 26 On the Digital Stereo routed directly to the volume control. Other Settings Temporary Group Delay There are three dynamic range settings avail Pagina 28 Controlling Zone 2 from the Remote Location RSP1098 Surround Sound Processor 28. More extensive contour adjustments for all This might be useful for sending a line level. Pagina 29 System Status 29 English. SETUP Menu Basics System Status The RSP1098 features two types of informa Navigation Buttons. Pagina 30 Input Setup RSP1098 Surround Sound Processor 30. Main Menu on the TV monitor by interrupting the progressive ing source; however a different. Pagina 31 Multi Input Setup 31 English Pagina 32 Understanding Speaker Configuration RSP1098 Surround Sound Processor 32 Pagina 33 Speaker Setup 33 English.


Pagina 34 Subwoofer Setup RSP1098 Surround Sound Processor 34. To change a setting on the SPEAKER SETUP cess the ADVANCED SPEAKER SETUP menu, Subwoofer. Pagina 35 Test Tone 35 English Remember the setting of the master volume con POWER This setting determines how the Zone 2 Setup MAX VOL Specifies a maximum volume level. RSP1098. Pagina 38 Troubleshooting RSP1098 Surround Sound Processor 38. To memorize USER DEFAULT settings No video output on TV monitor. Many of the current. Pagina 39 General 39 English. Video and Audio do not match. This affects some functions such as Discover our new design with all the usual functions. We hope you'll have fun using it! Please check your connection and try again. Please refresh this page or try again later. A polarized plug has two A grounding When the provided plug Warning Changes or modifications to this unit not expressly approved by the party NOTE This equipment has been tested and found to comply with the limits for a. Class. B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to This equipment generates, uses, and can radiate radio frequency energy and, if not However, there is no guarantee that interference will not If this equipment does cause harmful interference to radio This device complies with Part 15 of the FCC Rules. Operation The antenna used for this transmitter must be installed to Additional Warnings L'appareil ne doit pas etre expose aux ecoulements ou aux eclaboussures et aucun Pour etre completement deconnecte de Les piles ne doivent pas etre exposees a de forte chaleur, tel qu'a la Attention marquage est situe sur le panneau arriere ou inferieur de l'unite. Le marquage est situe sur le panneau arriere ou inferieur de l'unite. Use a protective barrier between the unit and surface to protect If the unit is displaying erratic behavior move Replace only with the same or equivalent type. Remplacer les piles seulement par le meme type de pile ou l'equivalent. Alkaline batteries in the unit.

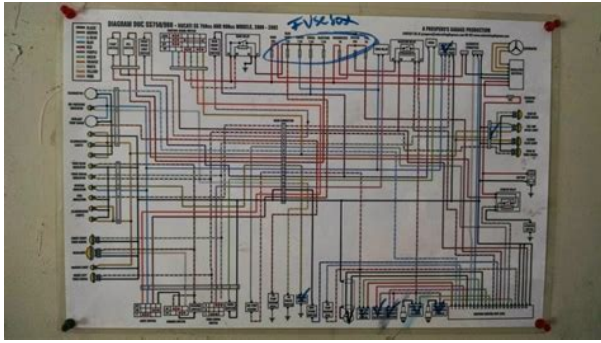

<https://www.informaquiz.it/petrgenis1604790/status/flotaganis18052022-2310>

Only use rechargeable NiMH batteries. Contact your local government They should never be incinerated since they might Mains plug is used as disconnect device and it should remain readily operable during La prise du secteur est utilise pour deconnecter le systeme. La prise du secteur ne doit pas etre obstruee ou doit etre facilement Pour etre completement deconnecte de Do not mix old and new batteries. Do not mix alkaline, standard carbonzinc, or rechargeable nicad, nimh, etc No mezcle baterias viejas y nuevas. No mezcle baterias alcalinas, estandar carbonozinc o recargables nicad, nimh, Included A1 Source. A2 Previous tune. A4 Next Tune. A7 Line In. A8 iPod. A9 Bluetooth. A10 Pair. A11 Power. A12 Release button B4 LINE IN jack. B5 DC IN jack. B6 ROut jack. B7 LOut jack Power Docking an iPod or iPhone, or iPad Remark To see video in landscape orientation, push down the 30pin connector and To reset connector, please slide the RELEASE button. Using the 3.5mm Audio Input. Requires a 3.5mm audio cable Using the Composite Video Output. Requires an RCA composite video cable included Bluetooth Function Bluetooth mode. When pairing, remain within 3 feet of the Bluetooth device, select the "ISDB752B" in If your device requests a password, enter Refer to the user's manual for your specific After initial pairing, the unit will stay paired If your device should become unpaired or Note ISDB752B can store up to 8 devices. The ninth paired device will replace the The tenth device paired will replace the Playing Audio Wirelessly Bluetooth Device. Pause button. Bluetooth device will now be heard through the speakers. PDF Version 1.4. Linearized Yes. XMP Toolkit 3.1701. Producer Acrobat Distiller 7.0 Windows. Creator Tool PScript5.dll Version 5.2.2. Creator Administrator. Document ID uuida41a334c05164a249580ff68989239ec. Instance ID uuid3185f9729a5b42aebc1fe0499c424a55. Page Count 13. Author Administrator. Please choose a different delivery location.


<http://hydroconseil.com/images/canon-4050-manual.pdf>

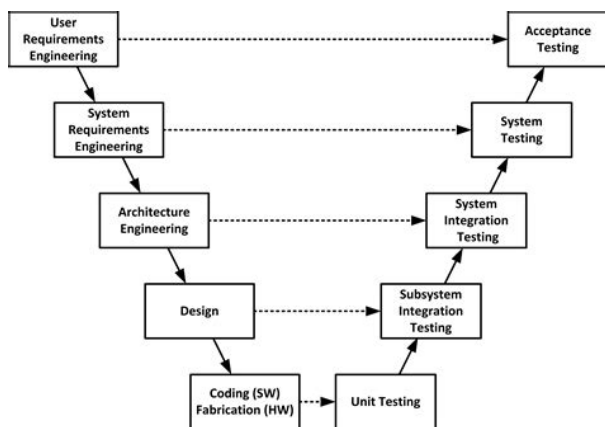

Our payment security system encrypts your information during transmission. We don't share your credit card details with thirdparty sellers, and we don't sell your information to others. Please try again. Please try again. This is NOT an original as originals are out of print, but we use the best scans

available. Plastic Comb Bound with clear plastic on front and back covers to help protect manual. All manuals are in public domain or printed with permission. Then you can start reading Kindle books on your smartphone, tablet, or computer no Kindle device required. To calculate the overall star rating and percentage breakdown by star, we don't use a simple average. Instead, our system considers things like how recent a review is and if the reviewer bought the item on Amazon. It also analyzes reviews to verify trustworthiness. Something went wrong.Learn more opens in a new window or tab This amount is subject to change until you make payment. For additional information, see the Global Shipping Program terms and conditions opens in a new window or tab This amount is subject to change until you make payment. If you reside in an EU member state besides UK, import VAT on this purchase is not recoverable. For additional information, see the Global Shipping Program terms and conditions opens in a new window or tab Delivery times may vary, especially during peak periods. Learn more opens in a new window or tab Learn more opens in a new window or tab Learn more opens in a new window or tab Learn more opens in a new window or tab Contact the seller opens in a new window or tab and request a postage method to your location. Please enter a valid postcode. Please enter a number less than or equal to 291. If you dont follow our item condition policy for returns, you may not receive a full refund.

<http://i-facet.com/images/canon-420ex-manual.pdf>

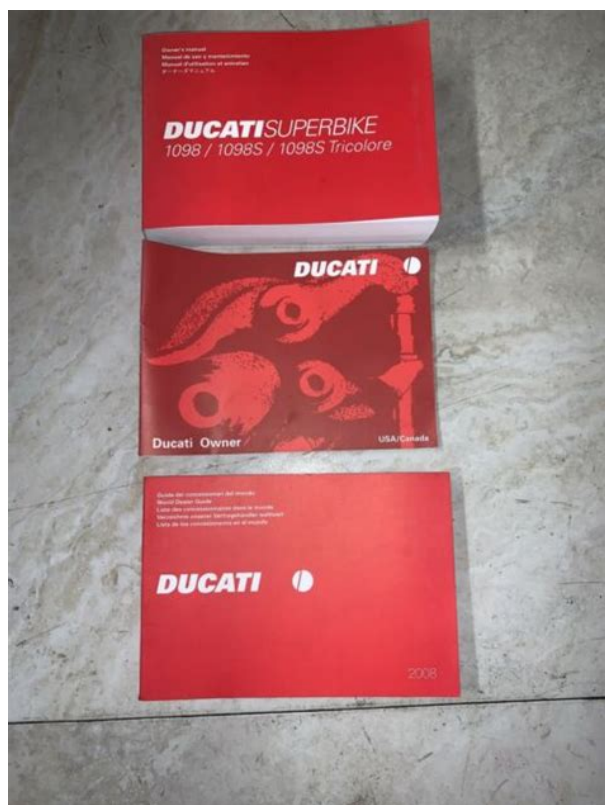

Refunds by law In Australia, consumers have a legal right to obtain a refund from a business if the goods purchased are faulty, not fit for purpose or dont match the sellers description. More information at returns. All Rights Reserved. User Agreement, Privacy, Cookies and AdChoice Norton Secured powered by Verisign. Manual part 1098 When a rear wiper auto stop signal is in the condition listed below, BCM stops power supply to rear wiper after rear wiper is activated for five seconds. BCM increases the turn signal lamp blinking speed if the bulb or harness open is detected with the turn signal lamp operating. NOTE The blinking speed is normal while activating the hazard warning lamp. It increases like 1 It is counted from 1 again when turning ignition switch OFF. For a

clearer look, you are able to open a few examples below. Each of the illustrations about Ducati 1098 2005 2009 Workshop Manual on this website, we get from a number of sources so you can create a better record of your own. If the search you get here does not match up what you are looking for, please make use of the search feature that we possess provided here. You will be free to download something that we provide here, expense cost you the particular slightest. Ask your question here. Provide a clear and comprehensive description of the issue and your question. The more detail you provide for your issue and question, the easier it will be for other BuschJaeger 1098 U101 owners to properly answer your question. Ask a question About the BuschJaeger 1098 U101 This manual comes under the category Thermostat and has been rated by 1 people with an average of a 9.9. This manual is available in the following languages English. Do you have a question about the BuschJaeger 1098 U101 or do you need help. Ask your question here BuschJaeger 1098 U101 specifications Brand ManualSearcher.com ensures that you will find the manual you are looking for in no time.

Our database contains more than 1 million PDF manuals from more than 10,000 brands. Every day we add the latest manuals so that you will always find the product you are looking for. Its very simple just type the brand name and the type of product in the search bar and you can instantly view the manual of your choice online for free. ManualSearcher. com If you continue to use this site we will assume that you are happy with it. Read more Ok. Learn more opens in a new window or tab This amount is subject to change until you make payment. For additional information, see the Global Shipping Programme terms and conditions opens in a new window or tab This amount is subject to change until you make payment. For additional information, see the Global Shipping Programme terms and conditions opens in a new window or tab Learn More opens in a new window or tab Learn More opens in a new window or tab Learn More opens in a new window or tab Learn More opens in a new window or tab See the sellers listing for full details. Contact the seller opens in a new window or tab and request post to your location. Please enter a valid postcode. Please enter a number less than or equal to 998. You're covered by the eBay Money Back Guarantee if you receive an item that is not as described in the listing. Find out more about your rights as a buyer opens in a new window or tab and exceptions opens in a new window or tab. All Rights Reserved. We are sure that you will use your Ducati for longer journeys as well as short daily trips, but however you use your motorcycle, Ducati Motor Holding s.p.a wishes you an enjoyable ride. We are continuously working to improve our Technical Assistance service. For this reason, we recommend that you follow strictly the instructions in this manual, especially those regarding the running period. In this way, you can be sure your Ducati motorcycle will continue to be a pleasure to ride.

<http://cameronhaddock.com/wp-content/plugins/formcraft/file-upload/server/content/files/1627454a812c65---brother-3045-manual.pdf>

For repairs or advice, please contact one of our authorized service centres. We also provide an information service for all Ducati owners and enthusiasts for any advice and suggestions you might need. Enjoy the ride! Notes Ducati Motor Holding S.p.A. cannot accept any liability for errors that may have occurred in the preparation of this manual. All information in the manual is valid at the time of going to print. Ducati Motor Holding S.p.A. reserves the right to make any modifications required due to the ongoing development of their products. For safety and reliability, to avoid invalidating the warranty and to maintain the value of your motorcycle, use only original Ducati spare parts. Warning This manual is an integral part of the motorcycle and, if ownership of the motorcycle is transferred to a third party, the manual must be handed over to the new owner. Our highly qualified staff have access to the specialized tools required to perform any servicing job to the highest professional standards, using only Ducati original spare parts as the best guarantee for perfect interchangeability, smooth running and long service life. All Ducati

motorcycles come with a Warranty Booklet. However, the warranty does not apply to motorcycles used in competitions. If any motorcycle part is tampered with, modified, or replaced with parts other than original Ducati spare parts during the warranty period, the warranty is automatically invalidated. Symbols Ducati Motor Holding S.p.A. advise you to read this manual carefully in order to familiarise yourself with your motorcycle. If in doubt, please contact a Ducati Dealer or Authorized Service Centre. You will find the information in the manual useful on trips which Ducati Motor Holding S.p.A. hopes will be smooth and enjoyable, and it will help you obtain top performance from your motorcycle for a long time.

chloroacetic-acid.com/upload/files/20220518_082113.pdf

This booklet uses a set of symbols with special meanings. Warning Failure to comply with these instructions may put you at risk, and lead to severe injury or even death. Notes Additional information about the current operation. The terms right and left are relative to the direction of running of the motorcycle. Many accidents are the result of the inexperience of the rider. Always make sure you have your licence with you; you need a valid licence that entitles you to ride a motorcycle. Do not lend your motorcycle to persons who are inexperienced or do not hold a valid licence. Riders and passengers must always wear appropriate clothing and a safety helmet. Do not wear loose clothes or accessories that could become tangled in the controls or limit your field of vision. Never start or run the engine in an enclosed space. Exhaust gases are toxic and may lead to loss of consciousness or even death within a short time. Always hold the handle bars firmly with both hands so you will be ready for sudden changes in direction or in the road surface. The pillion passenger should always hold on to the grab rail on the rear seat with both hands. Obey the legal requirements and observe national and local regulations. Always respect the speed limits where these are indicated, and never exceed the speed allowed by the particular visibility, road and traffic conditions. Always signal your intention to turn or change lane in good time, using the appropriate turn signal indicators. Be sure you are clearly visible and avoid riding within the blind spot of a vehicle in front of you. Be very careful at road junctions, or when riding in areas near exits from private land or car parks, or on the slip roads to motorways. Always turn off the engine when refuelling. Be extremely careful not to spill fuel on the engine or on the exhaust pipe when refuelling. Do not smoke when refuelling.

While refuelling, it is possible to inhale noxious fuel vapours. Should any fuel drops be spilled on your skin or clothing, immediately wash with soap and water and change your clothing. Always remove the key if leaving your motorcycle unattended. The engine, exhaust pipes and silencers remain hot for a long time. Warning The exhaust system might be hot even after engine is switched off; take special care not to touch exhaust system with any part of your body and do not park the motorcycle next to inflammable material wood, leaves etc.. Park your motorcycle where no one is likely to knock against it, and use the sidestand. Never park on uneven or soft ground, or your motorcycle may fall over. Even weight distribution is critical for maintaining safety standards and to avoid getting into difficulties when making sudden manoeuvres or riding on bumpy roads. Information on load capacity The total weight of the motorcycle in running order with rider, luggage and additional accessories should not exceed 390 kg. Arrange your luggage or heavy accessories in the lowest possible position and as close to centre of the motorcycle as possible. Secure the luggage firmly to the motorcycle structure. Luggage incorrectly secured may cause the motorcycle to become unstable. Never attach bulky or heavy objects to the top yoke or front mudguard, as this would cause dangerous instability. Do not insert objects into gaps in the frame, where they could interfere with moving parts. Check that the tyres are inflated to the pressure indicated on page 89 and that they are in good condition. Frame number Engine number fig. 1 fig. 2 Be sure to read this information carefully before you use the controls. Position of the motorcycle controls fig. 3 1 Instrument panel. 2 Keyoperated ignition switch and steering lock. 3 Lefthand handle bar switch.

4 Clutch lever. 5 Rear brake pedal. 6 Right hand and handlebar switch. 7 Throttle twistgrip.

8 Front brake lever. 9 Gearchange pedal. 10 1 4 3 2 9 8 5 7 6 fig. 3 Indicates engine revs per minute. 3 Neutral N indicator green. Illuminates when the gearbox is in neutral. 4 Fuel warning light yellow. Comes on when there are about 3 litres of fuel left in the tank. 5 Turn indicator light green. Illuminates and flashes when the turn indicator is in operation. 6 Engine oil pressure light red. Comes on when engine oil pressure is too low. This light must illuminate when ignition is switched to ON and must go out a few seconds after the engine starts. It may come on briefly if the engine is very hot, but should go out again as engine speed increases. Important Do not use the motorcycle if the light 6 stays on, or engine damage may result. 7 High beam light blue. Comes on when high beam is on. 8 EOB light amber. This light is lit steadily if the engine control unit has found errors and has therefore blocked the engine. The light doubles as an indicator for the immobilizer override procedure using the throttle twistgrip. Comes on when there is a problem with the motorcycle diagnostics. 10 Limiter light. 2 10 1 5 9 8 6 3 4 5 7 fig. 4 Button used for displaying and setting instrument panel parameters. A 12 B 11 fig. 5 Shows distance travelled in on the reserve fuel. 5 Clock. 6 Lap time. 7 Rev counter RPM. 8 Recording of lap time, maximum speed and maximum rpm. 9 Battery voltage indicator BATT. 10 Air temperature indicator. 11 Coolant temperature indicator. Indicates engine coolant temperature. Important Stop riding if the temperature reaches maximum value, otherwise engine damage could result. 5 10 11 2 3 4 1 6 7 9 8 12 13 14 fig. 6 The message is displayed only at KeyOn for 5 seconds. The counter is reset at a DUCATI Authorised Workshop during the maintenance operations. 13 Immobilizer indicator CODE fig. 6.

The message "CODE" appears when the key code is wrong or not recognized, and flashes after an error signal from the immobilizer system has been reset by performing the immobilizer override procedure using the throttle twistgrip see page 38. 14 DAQ USB fig. 6. Indicates that the USB DAQ has been activated. The related menus are for use by trained personnel only. If you accidentally access this function, turn the key to OFF and have the motorcycle inspected at an authorized Ducati Service Centre. The model is displayed cyclically until the engine is started. ENGINE OFF ENGINE OFF ENGINE OFF ENGINE OFF ENGINE OFF ENGINE RUNNING fig. 7 The reading is saved permanently and cannot be reset. If it exceeds 999 99 km or 99999 miles, the reading "99999" remains displayed permanently. vs. EU vs. UK v.s. USA fig. 9 If the system's units of measurement are changed at any time with the "Setting Special" function, the reading in this function is reset and the count restarts from zero in the newly set unit of measurement. If the reading exceeds 999.9, it is reset and the count restarts automatically. If the system's units of measurement are changed at any time with the "Setting Special" function, the reading in this function is reset and the count restarts from zero in the newly set unit of measurement. vs. EU vs. UK v.s. USA fig. 10 vs. EU vs. UK v.s. USA fig. 11 If the fuel level remains in reserve, the reading is saved even after KeyOff. The count stops automatically when the fuel level rises above reserve. If the reading exceeds 99 9.9, it is reset and the count restarts automatically. Air temperature indicator Shows the outside air temperature. The message "SERV" appears on the display at the following intervals after the first 1000 km on the odometer; every 12000 km on the odometer. The message is displayed only at KeyOn for 5 seconds. When the message appears, contact a Ducati dealer or authorized service centre. fig.

15 As well as the top rev counter scale, the display also shows engine rpm numerically so that you can adjust the idle speed more precisely. fig. 17 You can save a maximum of 30 laps in the memory. If the memory is full, each time you press the FLASH button, the display will not save any more lap times and will display the flashing message "FULL" for 3 seconds until the memory is reset. fig. 18 If the LAP function is active and the display is suddenly switched off KeyOff, the LAP function is switched off automatically even if the timer was ON, the lap in progress is not saved. If the timer

is not stopped, when it reaches 99 minutes, 59 seconds and 99 hundredths, it restarts from 0 zero and continues until the function is switched off. If, however, the LAP function is switched on and the memory has not been cleared, but the less than 30 laps have been saved e.g. 18 laps, the display will save any remaining laps until the memory is saturated in this case, it will save a further 12 laps. In this function, lap time only is displayed, but other data are also saved MAX speed, MAX rpm, limiter if reached for viewing at a later date in the Lap Memory function. Press C Press C after 10 sec. To display the saved times, go into the menu and select the "LAP MEM" page. The display will show the lap number, lap time, MAX speed and the MAX rpm reached for the lap in question. In this case, if the LAP function was active, it is switched off automatically. The MAX speed saved is the speed shown on the display in Lap function. START and STOP the lap separator by pressing the high beam FLASH button 12, fig.5 on the lefthand switch. If the USB function is active and the display is suddenly switched off KeyOff, the function is switched off automatically. fig. 21 To delete the data, go into the menu and select the "Erase USB" page. Any anomalous behaviours of the motorcycle are displayed.

If there are several errors, they are displayed in rolling mode every 3 seconds. The table below shows the errors that can be displayed. Warning light Error message Error COIL 10.1 Horizontal cylinder coil error COIL 10.2 Horizontal cylinder coil error COIL 11.1 Vertical cylinder coil error COIL 11.2 Vertical cylinder coil error INJE 12.1 Horizontal cylinder injector error INJE 12.2 Horizontal cylinder injector error INJE 13.1 Vertical cylinder injector error In this case the instrument panel, using sensors that measure ambient temperature and light intensity, automatically turn the backlight on or off. Intelligent headlamp switchoff This function is used to reduce the consumption of battery power, by automatically switching off the front headlamp. The device is triggered in 2 cases in the first case, if you turn the key from OFF to ON and do not start the engine within 60 seconds, the headlight is turned off and will be turned on again only when the engine is next switched on. in the second case, after normal use of the vehicle with the lights on, if the engine is killed via the RUN STOP button on the RH switch. In this case, the headlamp is switched off 60 seconds after the engine is switched off, and only switched on again the next time the engine is started. Intelligent headlamp switchon This function allows programmed activation of the headlamp even with the motor cycle off KeyOff. Further switchon time can be added only if you press the button again within these 30 seconds. If the 30 seconds have elapsed, no further multiples of 30 seconds can be added, and the instrument panel will switch off the headlamp. If the battery power is interrupted at any time while this function is active, when power is restored the instrument panel will deactivate the function the instrument panel does not remain active for 60 seconds.

<http://www.bouwdata.net/evenement/bose-lifestyle-28-ii-manual>